

# ELECTRIC COMBI OVEN (CONT'D)

- Automatic preheating & delayed start programming
  - Multi-timer function for multiple & mixed cooking
  - Fan inversion, speed control and motor break
  - 5 Fan speeds and semi-static cooking
  - Temperature up to 270°C / 520°F
  - Pre-loaded & online cookbook + USB
  - Custom preset programs mode
  - BakeDRY automatic chimney opening
  - BakeSTEAM steam control in percentages
  - BakeCLEAN automatic washing system
  - BakePOINT single core probe\*
  - 9 Cooking modes\*
  - Accommodates 18" x 26" bunpans\*
- \* BISTROT models only (see next page)



## BISTROT 4T VISION

### B-B4T-V

**Ext. Dimensions** 33<sup>1/2</sup><sub>[W]</sub>" x 38<sub>[D]</sub>" x 26<sup>1/2</sup><sub>[H]</sub>"

**Weight** 150 lbs / 68 KG

**Power** 7.5 KW

208V / 1PH - 36.1 AMP

208V / 3PH - 20.9 AMP

240V / 1PH - 31.3 AMP

240V / 3PH - 18.1 AMP

## OPTIONS


- BakeHIN vacuum core probe
- BakeNET network connection
- Left door opening
- Pasteurisation kit
- Multipoint core probe
- CORO-200 Water filter system



TOS-XXXX-SS


**NEED STAINLESS  
STEEL EQUIPMENT  
STANDS?**

**CHECK OUT**



**FOR MORE SIZES**

[WWW.THORINOX.COM](http://WWW.THORINOX.COM)

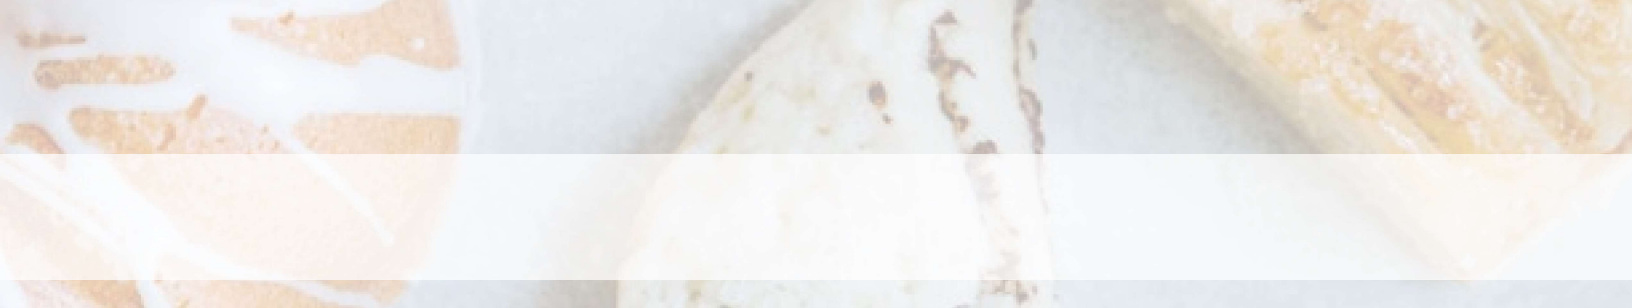

## BISTROT 6T VISION

# B-B6T-V

**Ext. Dimensions** 33<sup>1/2"</sup><sub>[W]</sub> x 38"<sub>[D]</sub> x 32<sup>5/8"</sup><sub>[H]</sub>

**Weight** 183 lbs / 83 KG

**Power** 10 KW

208V / 1PH - 48.1 AMP

208V / 3PH - 27.8 AMP

240V / 1PH - 41.7 AMP

240V / 3PH - 24.1 AMP



## BISTROT 10T VISION

# B-B10T-V

**Ext. Dimensions** 33<sup>1/2"</sup><sub>[W]</sub> x 38"<sub>[D]</sub> x 45<sup>1/4"</sup><sub>[H]</sub>

**Weight** 247 lbs / 112 KG

**Power** 15 KW

208V / 1PH - 72.2 AMP

208V / 3PH - 41.7 AMP

240V / 1PH - 62.5 AMP


240V / 3PH - 36.1 AMP

## INCLUDED WITH EVERY COMBI OVEN PURCHASE

### SOF12B WATER SOFTENING CARTRIDGE SYSTEM

Softens water to 0 grains; reducing scale formation and maintenance costs.

**Flow rate** 1 GPM (3.8 LPM)      **Max Water Pressure** 90 psi / 6.2 bar / 620 kPa  
**Connections** 1" FNPT      **Feed temperature range** 35-100°F (2-38°C)

Includes **RC2BG05N** disposable softening cartridge. Refills available at 



# ELECTRIC COMBI OVEN (CONT'D)

- 5 cooking modes
- Accommodates 18" x 26" bunpans
- Manual & time-programmable steam injection
- Cooking chamber automatic cooling
- Safety Rinse



## MISTRAL 6TTR VISION

**B-M6TTR-V**

**Ext. Dimensions** 39<sup>3/8"</sup><sub>[w]</sub> x 35<sup>1/2"</sup><sub>[d]</sub> x 27<sup>3/8"</sup><sub>[h]</sub>

**Weight** 305lbs / 138Kg

**Power** 10 kW

208V / 1PH - 48.1 AMP  
208V / 3PH - 27.8 AMP  
240V / 1PH - 41.7 AMP  
240V / 3PH - 24.1 AMP



## MISTRAL 10TTR VISION

**B-M10TTR-V**

**Ext. Dimensions** 39<sup>3/8"</sup><sub>[w]</sub> x 35<sup>1/2"</sup><sub>[d]</sub> x 56<sup>7/8"</sup><sub>[h]</sub>

**Weight** 452lbs / 205Kg

**Power** 20 kW

208V / 1PH - 48.1 AMP  
208V / 3PH - 27.8 AMP  
240V / 1PH - 41.7 AMP  
240V / 3PH - 24.1 AMP